

Equipment for Service and Maintenance of SF₆-Switchgear and Circuit -Breaker

Certified acc. EC 305/2008

SF₆—Refilling Cart



GRC - 250 / GRC - 400

Refilling cart with rubber wheels

Connection for SF₆— bottle W21,80 x 1/14"

Reducer for SF₆- gas

Manometer 0 – 40 bar, manometer 0 - 10 bar

Safety valve

Hose DN8 - 0,8 m, with ball valve

Hose DN8 - 5 m, connection DN8 and DN20

Weighing device with digital display, 0– 150 kg (optional)


Storage box for adapters

Dimension: 640 x 690 x 1420 mm (L x B x H)

Weight: app. 34 kg

Options upon request:

Diff. adapter w/quick connection, to all gas connection
(DN8, DN20, ALSTOM, ABB, Schneider, AREVA, Sprecher & Schuh)

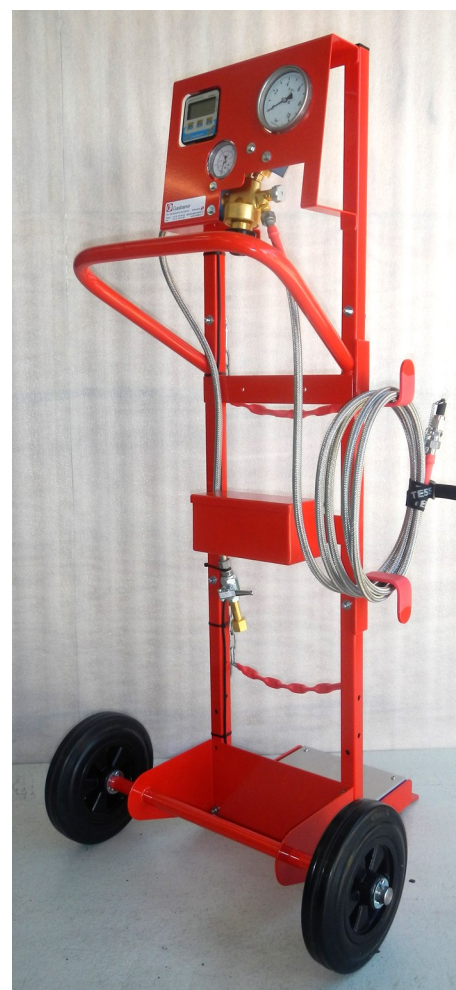

Typ	Wheels Ø250	Wheels Ø400	Metal clad hose	Rubber hose	Scale
GRC-250-R01	X		X		
GRC-250-R02	X		X		X
GRC-250-R11	X			X	
GRC-250-R12	X			X	X
GRC-400-R01		X	X		
GRC-400-R02		X	X		X
GRC-400-R11		X		X	
GRC-400-R12		X		X	X