


Equipment for Service and Maintenance of SF₆-Switchgear and Circuit -Breaker

Certified acc. EC 305/2008

SF₆—Refilling Cart, type GRCVP

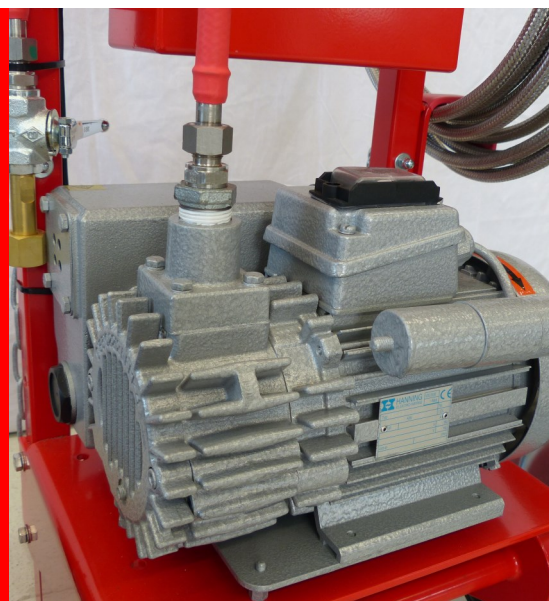

GRCVP- 250 / GRCVP - 400

Refilling cart with rubber wheels & vacuum pump
Connection for SF₆ – bottle W21,80 x 1/14”
Reducer for SF₆ - gas
Manometer 0 – 40 bar, manometer 0 - 10 bar
Safety valve
Metal clad hose DN8 - 0,8 m, with ball valve
Metal clad hose DN8 - 5 m, w/connection DN8 and DN20
Weighing device with digital display, 0 – 150 kg
Vacuum pump 16 m³/h, final vacuum < 0,5 mbar
Vacuum gauge
Ball valve
Storage box for adapters
Dimension: 640 x 690 x 1420 mm (L x B x H)
Weight: app. 72 kg

Options upon request:

Diff. adapter w/quick connection, to all gas connection -DN8, DN20, ALSTOM, ABB, Schneider, AREVA, Sprecher & Schuh



Typ	Wheels Ø250	Wheels Ø400	Scale
GRCVP-250-R01	X		
GRCVP-250-R02	X		X
GRCVP-400-R01		X	
GRCVP-400-R02		X	X